


NR-5S

Manual operating mechanism

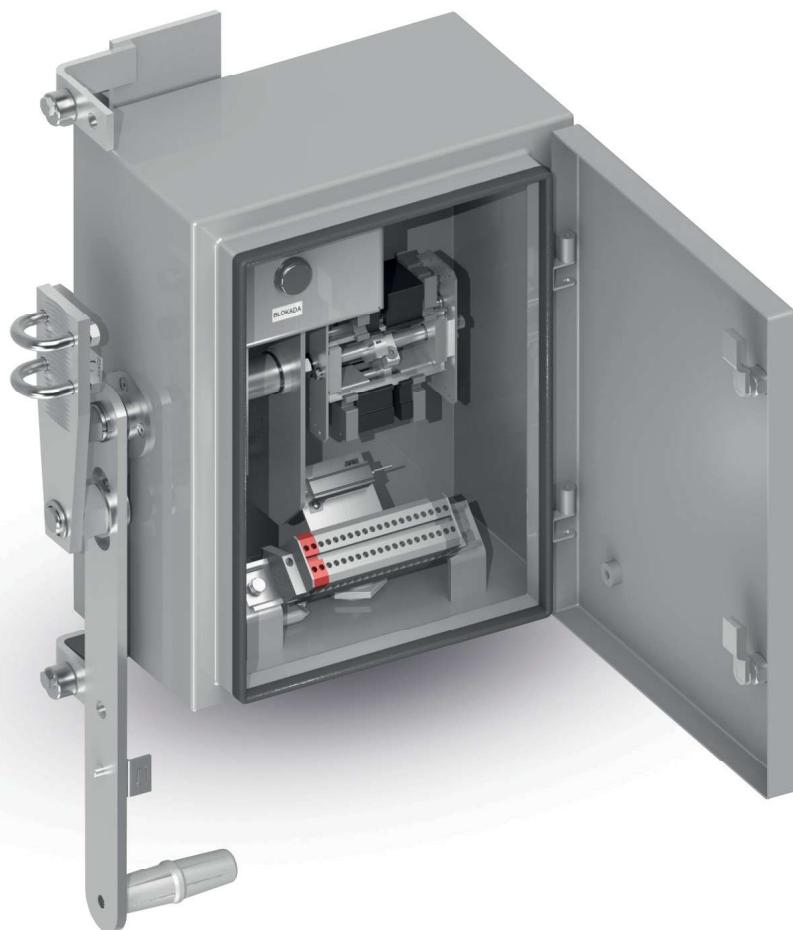

CHARACTERISTICS

- Excellent anti-corrosion protection
- Simple operating of MV disconnector/switch disconnector
- Extra blocking system with padlock available in limit positions
- Can be equipped with a manual locking
- Capability of interoperation with disconnectors from other manufacturers
- Position indicator (O, C)

SPECIFICATION

Item	Parameter	Value
1.	Rated torque	300 [Nm]
2.	Rated voltage: electromagnetic lock	230 [VAC] 220 [VDC] 110 [VDC]
3.	Rated power: locking coil	300 [W]
4.	Heater	230 [VAC] 220 [VDC] 110 [VDC]
5.	Main shaft angular displacement	192 [°]
6.	Rated switching capability of control switch	AC - 15; 230 [V]; 2,5 [A] DC - 13; 220 [V]; 0,25 [A] DC - 13; 110 [V]; 1 [A]
7.	Maximum conductor cross section	4 [mm ²]
8.	Enclosure protection rating	IP 55
9.	Rating mechanical strength	2000 cycles

DRAWING

